


product features		Vinyl floor base. 59 for glue down (dryback)	
Dimensions		1219,2 x 177,8 x 2 mm	609,6x 304,8 x 2 mm
Wear layer		0,3 mm	
Groove		V-groove 4-sided	
Gloss level		mat	
Packing Unit	pack:	15 pieces per pack (ca. 3,252 m ²)	16 pieces per pack (ca. 2,973 m ²)
	pallet:	80 packs per pallet (ca. 260,16 m ²)	84 packs per pallet (ca. 249,73m ²)
Weight	pack:	13,07 kg	11,97 kg
	pallet:	1070 kg	1030 kg

Tolerances: requirements DIN EN ISO 10582			
Flatness, f [%]	≤ 0,50/ ≤ 1,0 (longitudinal) ≤ 0,10/ ≤ 0,15 (in width)	Gap opening, o [mm]	≤ 0,15 (average) ≤ 0,20 (single)
Height differences, h [mm]	≤ 0,15 (average) ≤ 0,20 (single)	Thickness, t [mm]	≤ 0,25
Squareness, q [mm]	≤ 0,50	Length, l [mm]	max. 2,0
Straightness, s [mm/m]	≤ 0,30	Width, w [mm]	± 0,10, but max. 0,5 mm
Change in dimension due to humidity [%]	≤ 5 %		





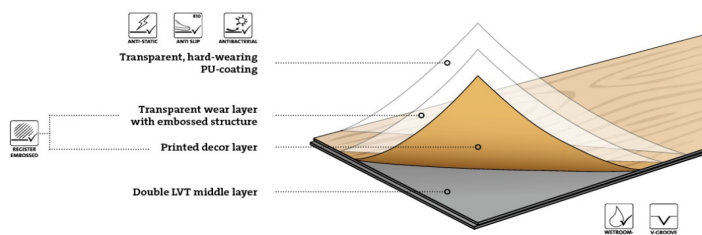











product construction:



Warranty (according to separate terms of warranty)		Comment
	domestic usage 15 years commercial usage 5 years	



Classification

	Usage Class	Test standard	Valuation
	Usage Class 23 heavy use in private living rooms	DIN EN 685	23
	Usage Class 31 moderate use in commercial sector	DIN EN 685	31
	Reaction to fire	DIN EN 13501-1	B (fl) s1 flame retardent
	Formaldehyde emission	EN 717-1:2005	fulfils requirements
	Light fastness	ISO-802	m > 6 grade
	Slide resistance	EN 13893	DS
	Slip resistance	DIN 51130	R10
	Electrical conductivity	EN 1081	≤ 10 ⁹ Ohm
	Electrostatics	EN 1815	≤ 2 kV (antistatic)
	Wear group	EN 660-1	T
	Residual indentation	EN 433	< 0,1 mm
	Resistance to chair castors	EN 425	No impact if soft chair castors are used (Typ W)
	Thermal resistance	DIN 52612	0,02 m ² k/W
	Warm water underfloor heating	EN 1264-2	suitable (max. 27°C)
	Sound absorption	EN 140-8	approx. 2 dB
	Chemicals test	EN 423	passed

Changed by:	ter Hürne	Date:	10.05.2017	Update:	http://www.terhuerne.de
-------------	-----------	-------	------------	---------	---