


Product properties		Laminate Floors						
Dimensions		1285 x 192 x 8	1286 x 194 x 8	1285 x 242 x 8	1286 x 243 x 8	1285 x 327 x 8	2000 x 192 x 10	2400 x 242 x 10
Groove Profile		without / V-groove 2-sided (2V) / V-groove 4-sided (4V) / U-groove 4-sided and centre						
Packing unit		CLICKIT EASY						
Weight	carton:	9 pieces per carton (app. 2.220 sqm)	8 pieces per carton (app. 1.996 sqm)	8 pieces per carton (app. 2.488 sqm)	7 pieces per carton (app. 2.187 sqm)	6 pieces per carton (app. 2.521 sqm)	5 pieces per carton (app. 1.920 sqm)	4 pieces per carton (app. 2.323 sqm)
	pallet:	40 packs per pallet (app. 88.80 sqm)	48 packs per pallet (app. 95.808 sqm)	30 packs per pallet (app. 74.64 sqm)	48 packs per pallet (app. 104.976 sqm)	45 packs per pallet (app. 113.45 sqm)	40 packs per pallet (app. 76.80 sqm)	42 packs per pallet (app. 97.57 sqm)
Weight	carton:	app. 15.50 kg	app. 14.00 kg	app. 17.30 kg	app. 15.50 kg	app. 17.40 kg	app. 17.00 kg	app. 20.00 kg
	pallet:	app. 635 kg	app. 653 kg	app. 534 kg	app. 645 kg	app. 798 kg	app. 695 kg	app. 855 kg



Tolerances: General requirements according to European Standard EN 13329

Flatness of the element, f [%]	fw, konkav ≤ 0.15% fw, convex ≤ 0.20% fl, konkav ≤ 0.50% fl, convex ≤ 1.00%	Openings between elements, o [mm]	≤ 0.15 (average) ≤ 0.20 (single value)
Height differences between elements, h [mm]	≤ 0.10 (average) ≤ 0.15 (single value)	Thickness of the element, t [mm]	≤ 0.50 (average) ≤ 0.50 (single value)
Squareness of the element, q [mm]	≤ 0.20	Length of the surface layer, l [mm]	max. ± 0.5
Straightness of the surface layer, s [mm]	≤ 0.30	Width of the surface layer, w [mm]	≤ 0.10 (average) ≤ 0.20 (single value)
Decor deviation [mm]	± 2.0		

Product structure:

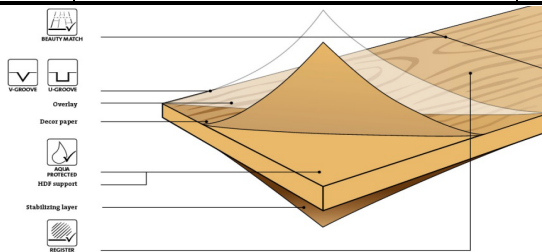

Warranty (according to our separate terms of warranty)	20 years for domestic use	Note	Vertical decor deviation of +/- 2mm is within the tolerances
--	---------------------------	------	--



\*A+ only valid for the dimensions 1286x194 and 1286x243



\*PEFC not valid for the dimensions 1286x194 and 1286x243

Rating		Test standard	Rating
	<b>Usage class</b> Heavy domestic use	EN 685	23
	<b>Usage class</b> Moderate commercial use	EN 685	32
	Abrasion resistance	EN 13329	IP ≥ 4000 turns ( AC4 )
	Reaction to fire	DIN EN 13501-1	C(f) s1 flame retardant
	Formaldehyde emission	EN 717-1	E1
	Light fastness	DIN EN 13329	Blue wool scale ≥ 6 Grey scale ≥ 4
	Slip resistance	EN 13893	The requirements are in compliance with DIN EN 14041 (my ≥ 0,3)
	Electrostatic behaviour	EN 1815	≤ 2 kV (antistatic)
	Imprint after constant loading	EN 13329 (EN 433)	no visible changes
	Resistance to chair castors	DIN EN 13329	No impact if soft chair castors are used (Type W) as defined by EN 425
	Thermal resistance	EN 12524	≤ 0,089 sqm x K / W
	Warm water underfloor heating	EN 1264-2	suitable with a maximum surface temperature of 27°
	Stain resistance	DIN EN 13329	Group 1 + 2 = Grade 5 Group 3 = Grade 4
	Impact stress resistance	DIN EN 13329	IC 2

Changed by:	ter Hürne	Date:	Okt. 17	Update:	www.terhuerne.de
-------------	-----------	-------	---------	---------	------------------