


Product features		Vinyl on HDF baseboard base.59	
Dimensions		1209 x 173 x 7,7 mm	
Wear layer		0,3 mm	
Groove		V-groove 4-sided	
Profile		ClickTec	
Gloss level		mat	
Packing	pack:	11 pieces per pack (ca. 2,301 m ²)	
	pallet:	50 packs per (ca. 115,04 m ²)	
Weight	pack:	17,24 kg	
	pallet:	867,5 kg	

Tolerances: requirements DIN 16511			
Flatness concave/convex, f [%]	≤ 0,50/ ≤ 1,0 (longitudinal) ≤ 0,15/ ≤ 0,20 (in width)	Gap openings, o [mm]	≤ 0,15 (average) ≤ 0,20 (single)
Height differences, h [mm]	≤ 0,10 (average) ≤ 0,15 (single)	Thickness, t [mm]	≤ 0,50
Squareness, q [mm]	≤ 0,20	Length, l [mm]	≤ 1500 mm: Δl ≤ 0,50 mm/m > 1500 mm: Δl ≤ 0,30 mm/m
Straightness, s [mm/m]	≤ 0,30	Width, w [mm]	± 0,10, max.- min. ≤ 0,2
Change in dimension due to temperature [%]	≤ 0,25		



Warranty (according to separate terms of warranty)	domestic usage 15 years commercial usage 5 years	Comment	
--	---	---------	--

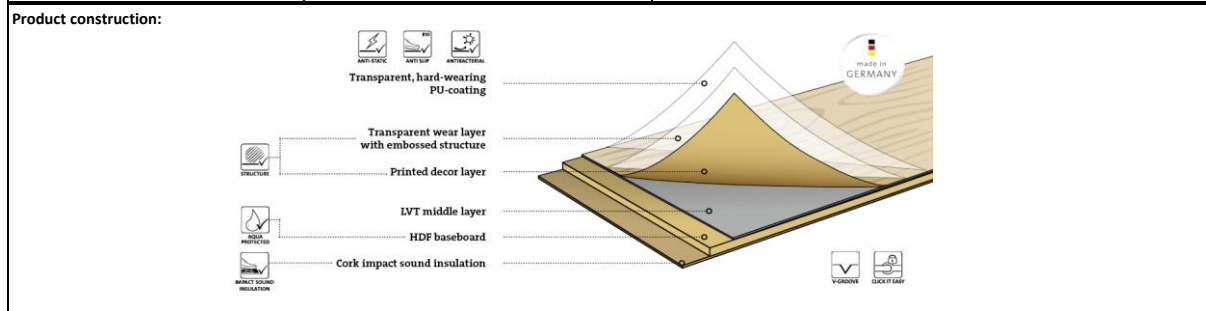

EN 14041 : 2008
15
DOP: THVAT1015

















PEFC
Förderung nachhaltiger
Waldwirtschaft
www.pefc.de



EMISSIONS DANS L'AIR INTÉRIEUR
A+
A+ A B C

Classification DIN 16511

	Usage class 23 Heavy use in private living rooms	Test standard	Valuation
	Usage class 31 Moderate use in commercial sector	EN 685	23
	Reaction to fire	DIN EN 13501-1	B (fl) s1 flame retardant
	Formaldehyde emission	EN 717-1:2005	fulfils requirements
	Light fastness	ISO-802	m > 6 grades
	Slide resistance	EN 13893	DS
	Slip resistance	DIN 51130	R10
	Electrical conductivity	EN 1081	≤ 10 ⁹ Ohm
	Electrostatics	EN 1815	≤ 2 kV (antistatic)
	Wear group	EN 660-1	T
	Residual indentation	EN 433	≤ 0,1 mm
	Resistance to chair castors	EN 425	No impact if soft chair castors are used (Typ W)
	Thermal resistance	DIN 52612	0,06m ² k/W
	Warm water underfloor heating	EN 1264-2	suitable ≤ 27 °C
	Sound absorption	EN 140-8	10 dB
	with AkusTec Alu 2 mm		16 dB
	Swelling in thickness	ISO 24336	≤ 18 %
	Chemicals test	DIN 68861 Part 1C	passed