


Product features		Design Vinyl Floor		
Dimensions		907,8 x 450,6 x 5 mm	1212,6 x 171,2 x 5 mm	1510,0 x 222,0 x 5 mm
Wear layer		0,55 mm		
Groove		V-gorrvé 4-sided		
Profile		ClickitEasy		
Gloss level		mat		
Packing	pack:	4 pieces per pack (ca. 1,636 m ²)	8 pieces per pack (ca. 1,661 m ²)	6 pieces per pack (ca. 2,011 m ²)
	pallet:	62 packs per pallet (ca. 101,43 m ²)	65 packs per pallet (ca 107,97 m ²)	48 packs per pallet (ca. 96,53 m ²)
Weight	pack:	16,16 kg	16,35 kg	18,73 kg
	pallet:	1052 kg	1113 kg	946 kg

Tolerances: requirements EN 14085			
Flatness, f [%]	≤ 0,50/ ≤ 1,0 (longitudinal) ≤ 0,10/ ≤ 0,15 (in width)	Gap openings, o [mm]	≤ 0,15 (average) ≤ 0,20 (single)
Height differences, h [mm]	≤ 0,15 (average) ≤ 0,20 (single)	Thickness, t [mm]	≤ 0,25
Squareness, q [mm]	≤ 0,50	Length, l [mm]	max. 2,0
Straightness, s [mm/m]	≤ 0,30	Width, w [mm]	± 0,10, but max. 0,5
Change in dimension due to humidity [%]	≤ 5		

Product construction:

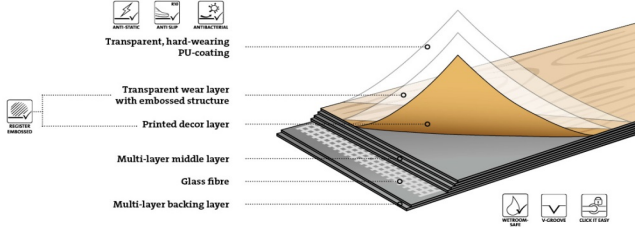

- Transparent, hard-wearing PU-coating
- Transparent wear layer with embossed structure
- Printed decor layer
- Multi-layer middle layer
- Glass fibre
- Multi-layer backing layer

Icons: WATER, WEAR, ANTI-STATIC, FLOORING, CLICKIT EASY

Warranty (according to separate terms of warranty)	domestic usage 20 years commercial usage 10 years	comment
--	--	---------



















 EN 14041 : 2004 / AC : 2006
 14
 DOP: THV0114









Classification			
	Usage class	Test standard	Valuation
	Usage class 23 heavy use in private living rooms	EN 685	23
	Nutzenklasse 33 heavy use in commercial sector	EN 685	33
	Nutzenklasse 42 moderate use in industrial sector	EN 685	42
	Reaction to fire	DIN EN 13501-1	B (fl) ≤1 flame retardant
	Formaldehyde emission	EN 717-1:2005	fulfils requirements
	Light fastness	ISO-B02	m > 6 Grade
	Slide resistance	EN 13893	DS
	Slip resistance	DIN 51130	R10
	Electrical conductivity	EN 1081	≤ 109 Ohm
	Electrostatics	EN 1815	≤ 2 kV (antistatic)
	Wear group	EN 660-1	T
	Residual indentation	EN 433	< 0,1 mm
	Resistance to chair castors	EN 425	No impact if soft chair castors are used (Typ W)
	Thermal resistance	DIN 52612	0,02 m ² k/W
	Warm water underfloor heating	EN 1264-2	suitable ≤ 27°C
	Sound absorption	EN 140-8	ca. 7 dB
	Chemicals test	DIN 68861 Part 1C	passed