


Product features		Design Vinyl Floor Perform		
Dimensions		908,1 x 450,9 x 6 mm	1212,9 x 177,8 x 6 mm	1517,7 x 235,0 x 6 mm
Wear layer		0,55 mm		
Groove		V-groove 4-sided   Design-bevel		
Profile		LockitEasy		
Gloss level		mat		
Packing	pack:	4 pieces per pack (ca. 1,638 m <sup>2</sup> )	10 pieces per pack (ca. 2,157 m <sup>2</sup> )	6 pieces per pack (ca. 2,140 m <sup>2</sup> )
	pallet:	48 packs per pallet (ca. 78,62 m <sup>2</sup> )	45 packs per pallet (ca. 97,07 m <sup>2</sup> )	40 packs per pallet (ca. 85,60 m <sup>2</sup> )
Weight	pack:	15,81 kg	20,82 kg	20,65 kg
	pallet:	799 kg	977 kg	876 kg

Tolerances: requirements EN 14085			
Flatness, f [%]	≤ 0,50/ ≤ 1,0 (longitudinal) ≤ 0,15/ ≤ 0,20 (in width)	Gap openings, o [mm]	≤ 0,15 (average) ≤ 0,20 (single)
Height differences, h [mm]	≤ 0,10 (average) ≤ 0,15 (single)	Thickness, t [mm]	≤ 0,50
Squareness, q [mm]	≤ 0,20	Length, l [mm]	l ≤ 1500mm ≤ 0,5; l > 1500mm ≤ 0,3
Straightness, s [mm/m]	≤ 0,30	Width, w [mm]	± 0,10, but max. ≤ 0,20mm
Change in dimension due to humidity [%]	≤ 0,25		

**Product construction:**

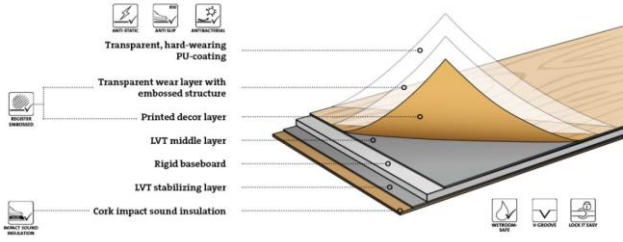

- Transparent, hard-wearing PU-coating
- Transparent wear layer with embossed structure
- Printed decor layer
- LVT middle layer
- Rigid baseboard
- LVT stabilizing layer
- Cork impact sound insulation

Warranty (according to separate terms of warranty)	domestic usage 20 years commercial usage 10 years	comment	
----------------------------------------------------	------------------------------------------------------	---------	--


















  
 EN 14041 : 2008  
 17  
 DOP: THR81217

  
 Health Product Declaration Collaborative

  
 floor score

  
 UL CERTIFIED ENVIRONMENTAL PRODUCT DECLARATION

  
 ÉMISSIONS DANS L'AIR INTÉRIEUR  
 A+

Classification			
	Test standard	Valuation	
 <b>Usage class 23</b> heavy use in private living rooms	EN 685	23	
 <b>Nutzenklasse 33</b> heavy use in commercial sector	EN 685	33	
 <b>Nutzenklasse 42</b> moderate use in industrial sector	EN 685	42	
 Reaction to fire	DIN EN 13501-1	B (fl) s1 flame retardant	
 Formaldehyde emission	EN 717-1:2005	fulfils requirements	
 Light fastness	ISO-B02	m > 6 Grade	
 Slide resistance	EN 13893	DS	
 Slip resistance	DIN 51130	R10	
 Electrical conductivity	EN 1081	≤ 10 <sup>9</sup> Ohm	
 Electrostatics	EN 1815	≤ 2 kV (antistatic)	
 Wear group	EN 660-1	T	
 Residual indentation	EN 433	< 0,1 mm	
 Resistance to chair castors	EN 425	No impact if soft chair castors are used (Typ W)	
 Thermal resistance	DIN 52612	0,02 m <sup>2</sup> k/W	
 Warm water underfloor heating	EN 1264-2	suitable ≤ 27°C	
 Sound absorption	EN 140-8	18 dB	
 Chemicals test	DIN 68861 Part 1C	passed	

Changed by:	ter Hürne	Date:	Jan. 18	Update:	<a href="http://www.terhuerne.de">http://www.terhuerne.de</a>
-------------	-----------	-------	---------	---------	---------------------------------------------------------------